

## Software Upgrade

USB flash upgrade.

- Please read the statement carefully before upgrade.
- Please double check the version of the upgrade software you are using, so you can restore it to the former version when your upgrade is failed. If your system is running well or just don't need the new function, we recommend you keep the default version. Please backup the important record files before upgrade.
- Do ensure supplying the power and the stability of network when upgrading. Network outages and interrupted power supply will cause upgrading failure.
- Please double check the version of the upgrade software, including machine model and boot interface, and make sure whether it corresponds to your system; If you have any doubts, don't upgrade.
- Don't modify the software (including the name of the firmware), otherwise, we will take no responsibility and will not provide free updates.
- When U disk upgrade, the upgrade file name must be upgrade.bin. **you should directly store the corresponding file to the U disk's root directory. Make sure your U disk format is FAT32 and no other files .**


### Steps:

1.Unzip the main program file


Copy upgrade.bin to the U disk.



2. Plug into the USB port on the back or front panel of the DVR, and wait for the DVR system recognizing the U disk.
3. Access to the main menu, select “sys.info”, click USB Upgrade.

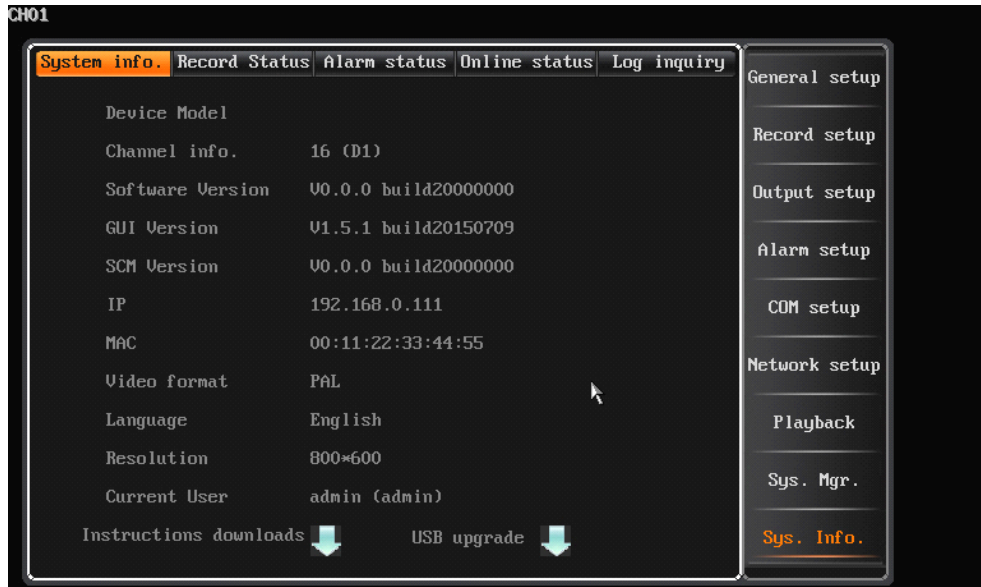

4.The host says " local upgradeing ",it will take 2-3 minutes.

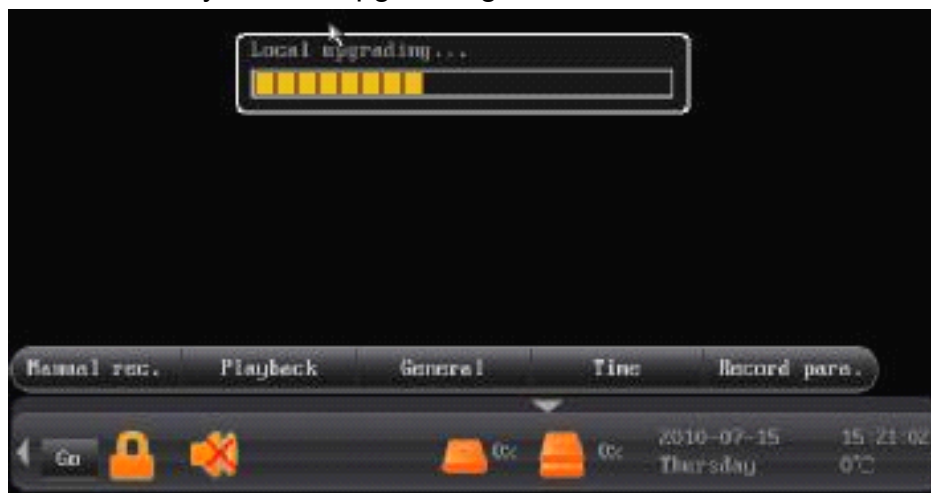

5.After upgrade finished, the host will pops out "update success, it's rebooting, please wait a moment...",that indicates the upgrade is successful, then the host will restart automatically;

6. After the system restart, the admin password is the former version's.

**Then again perform the same steps to upgrade logo file.**

**Remember**

**First main program, second logo file.**